

STAINLESS STEEL FILTER CARTRIDGES

The stainless steel Filter Cartridges are the perfect solution for all your liquid filtration requirements . DUBUISSON FILTRATION carefully selected this range of washable stainless steel cartridges offering many filtrations solutions from 840µm to 5µm

STAINLESS DOUBLE OPEN END CYLINDRICAL CARTRIDGE

Stainless steel
Cylindrical cartridge
With Double open End
(DOE design), and
Buna , Viton , EPDM ,
or TEFLON Seals



Single Open End
(SOE Design)
Cartridge with
male NPT End
connection

FEATURES AND ADVANTAGES

- Constructed entirely of steel 304 or 316 stainless , they are reusable , and support a differential pressure up to 4 Bars and more on request . DUBUISSON FILTRATION offers a range of fine Filtration from 800µm up to 5µm

STAINLESS STEEL DOUBLE OPEN END PLEATED CARTRIDGE

PLEAT PROTECTORS
Pleat Protectors prevent
accidental denting of pleat
forms that reduce filter
area. Made of Stainless
Steel with 1/4" dia.
Perforations, they
are held in place by
bending tabs at the
top and bottom.



Stainless steel
Pleated cartridge
With Double open End
(DOE design), and
Buna , Viton , EPDM ,
or TEFLON Seals

- Replace your meltblown or wound polypropylene disposable cartridges by washable stainless steel cartridges, limit thereby your production costs. They support up to 260 °C and are unaffected by most corrosive chemicals liquids

STAINLESS STEEL SINGLE OPEN END PLEATED CARTRIDGE

Stainless steel
Pleated cartridge with
screwed NPT Female
End connection
(SOE DESIGN)



Stainless steel
Pleated cartridge with
Single Open End and
CODE 222 END
CONNECTION



AVAILABLE FROM 9-3/4" UP TO 40"

DUBUISSON FILTRATION

990, Chemin de Sauvecanne
F-13320 BOUC BEL AIR

Tél.: +33 (0) 442 607 720

Fax.: +33 (0) 442 510 296

contact@dubuisson-filtration.fr

STAINLESS STEEL FILTER CARTRIDGES

HOW TO ORDER

Build an ordering code as shown in this example.


Suitable for fullflo Metallic Filter Cartridges replacement (PARKER),
Steelflex Stainless Steel cartridges replacement (PENTAIR INDUSTRIAL)

30 - 75 - P - B - S - DOE

CARTRIDGE LENGTH				END CONFIGURATION	
9-3/4 (247,65)	9-7/8 (250,83)			DOE = Double Open end with seals	
10 (254,00)	19-1/2 (495,30)			SOE = Single Open End with Seals	
20 (508,00)	29-1/2 (749,30)			222 = Twin O'RING*	
30 (762,00)			1NPTM = Male NPT, 1"		
MICRON RATING				ELEMENT MATERIAL	
840	190	75		S = 304 Stainless Steel	
540	150	40		S316 = 316 Stainless Steel	
370	120	20			
280	100	10			
230	80	5			
CONSTRUCTION				SEAL MATERIAL	
Pleated	= P			B = Buna N	
Cylindrical	= C			E = Éthylène propylène	
				V = Viton °	
				T = Teflon °	

* Opposite End closed

Dimensions (IN)

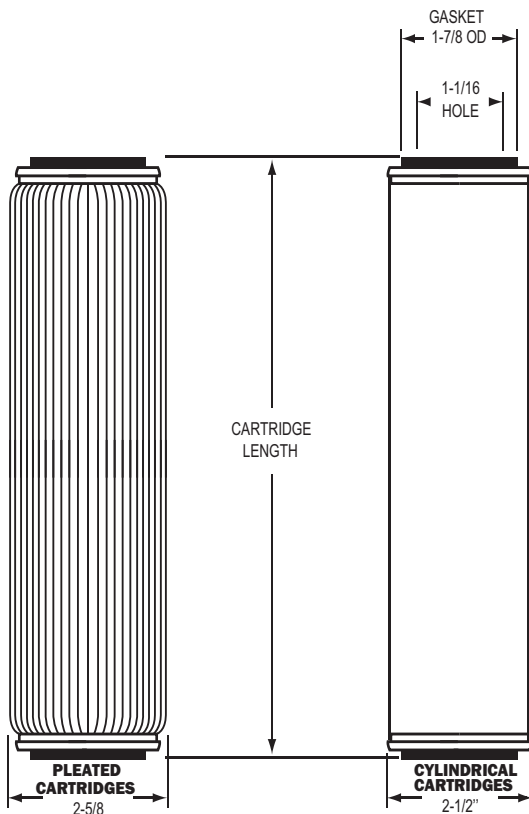

PLEAT PROTECTORS

Pleat Protectors prevent accidental denting of pleat forms that reduce filter area. Made of Stainless Steel with 1/4" dia. Perforations, they are held in place by bending tabs at the top and bottom. When ordering give nominal length (10, 20 or 30 inches) and material (304 or 316 Stainless Steel)